
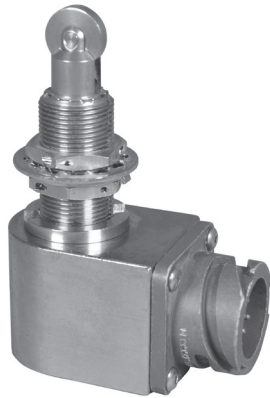


Limit Switches

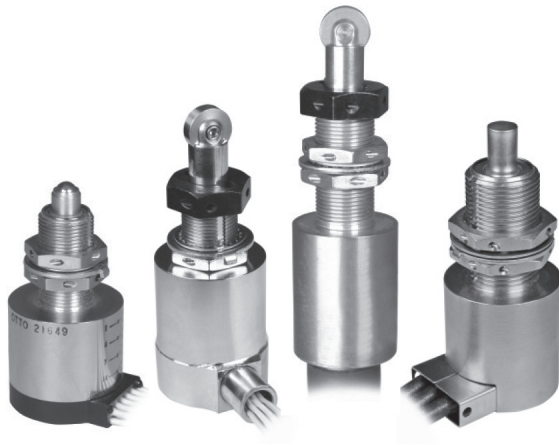

SERIES	FEATURE	ACTUATION	MAX RATING (Resistive @ 115VAC, 28VDC)	SEAL RATING	MOUNTING	CIRCUITRY
P6	Mil Grade, Sealed	(Pin, Roller) Momentary Action	7A	MIL-PRF 8805 Symbol 3 or Symbol 4	5/8", 15/32" Threaded	1, 2, & 4 Poles
P6-3	Subminiature, Sealed	(Lever, Plunger, Roller) Momentary Action	10A	MIL-PRF-8805 Symbol 3	3/8", 1/2" dia. Mounting Holes	1, 2 & 3 Poles
P6-4	Commercial, Sealed	(Ball, Roller) Momentary Action	4A	IP68S	9/16" Threaded	1 or 2 Poles